



ADVANCED PAVEMENTS TESTING SYSTEMS

RTFOT

Rolling thin-film oven




Determination of the resistance to hardening under the influence of heat and air

Standards ASTM D2872 | AASHTO T240 | EN 12607-1

Main Features

- Touch-screen display with 4.5" color control panel, including timer function, visual warnings and digital air flow indicator.
- Full conformity to temperature specifications (time to reach target temperature after switch on, target temperature adjustment after samples insertion) from the Standards.
- Carousel rotation with closed-loop controlled speed.
- **Safety features:** Automatic over-temperature switch, door switch, pilot lamp and alarm for door open with fan still running; magnetothermic switch.
- High quality stainless steel structure, internal and external.
- Door with double-glazed window.
- Door locking system allowing easy opening also with busy hands.



Detail of external stainless lining "linen patterned" resistant to scratches and shocks

Bitumen ovens for rolling thin-film oven test (RTFOT)

Two versions are available:

81-PV1612

Conforming to ASTM/AASHTO standards

81-PV1622

Conforming to EN standard

The only difference between the two models is the inside dimension of the testing chamber.

These ovens are used for measuring the effect of heat and air on a moving film of semi-solid bituminous materials. The internal chamber is made from stainless steel, insulated with fiberglass or similar, with an external frame made from engine-turned stainless steel and a door with a centrally located window.

Special attention has been given to the safety features which conform to CE requirements. The oven is supplied complete with digital flow meter, ASTM 13C thermometer and 8 heat resistant glass containers (64 mm high x 140 mm diameter).

The oven must be connected to a compressed air source supplying two bar maximum pressure. If not available in the laboratory, we recommend the 81-PV0161/12 Diaphragm pump. Please refer to the accessories section to the right.

The ASTM and EN versions are basically identical except for a small difference of the internal dimensions of the testing chamber.

Power: 3,000 W

External dimensions: 750 x 750 x 900 mm (W x D x H)

Weight: approx. 50 kg

Ordering information

ASTM/AASHTO versions

81-PV1612

RTFOT, Bitumen oven for rolling thin film oven test. ASTM version.

230 V, 50 Hz, 1 ph.

81-PV1613

As above but 220 V, 60 Hz, 1 ph.

81-PV1614

As above but 110 V, 60 Hz, 1 ph.

EN version:

81-PV1622

RTFOT, Bitumen oven for rolling thin film oven test. EN version.

230 V, 50 Hz, 1 ph.

Accessories

Diaphragm pump

81-PV0161/12

Free air displacement 6 liters/min, maximum pressure 2.4 bar (when used as an air compressor).

Power: 65 W

Weight: approx. 1.9 kg

81-PV0161/13

Scraper for RTFOT bottle.

81-PV0161/14

Metal rack for holding/cooling RTFOT bottles.

81-PV0161/15

RTFOT bottle tong.


Spares

81-PV0161/10

Spare glass container

82-PV0160/10

ASTM 13C Thermometer, +155 to +170°C, 0.5°C divisions.

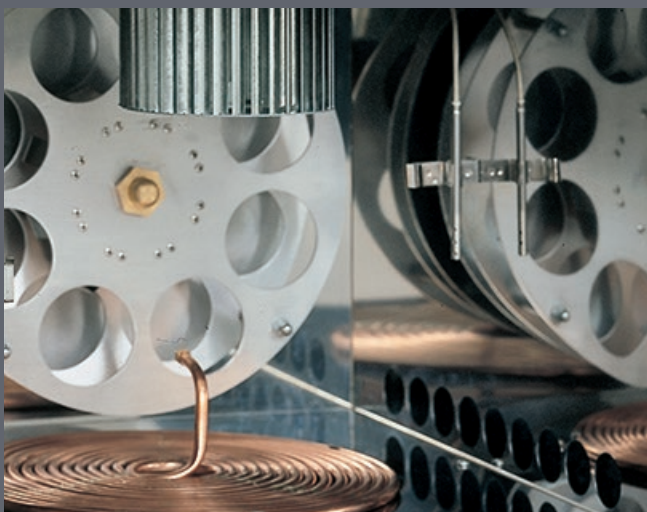

Door locking system allowing easy opening also with busy hands

▶ IPC Global Customer Care

At IPC Global we are proud of our products.

We are dedicated to supplying high quality, accurate, affordable, easy-to-use systems for Advanced Testing of asphalt, binders and other pavement materials.

As a valued customer of IPC Global you will receive continuous, expert support and advice for your instrument. Furthermore, we offer full installation and training in the correct operation of your IPC Global equipment.

For support from our expert Customer Care Team, contact your local IPC Global-Controls office/distributor or email ipcglobalsupport@controls-group.com.

Visit our website for more information www.controls-group.com/ipcglobal.



▶ Contact Us

IPC Global

E ipcglobalsales@controls-group.com www.controls-group.com/ipcglobal

CONTROLS Group USA

2521 Technology Drive, Suite 203, Elgin, IL 60124, USA T +1 847 551 5775 E info@controls-usa.com www.controls-usa.com

www.controls-group.com/ipcglobal

CONTROLS Group

T +39 02 92184 1

F +39 02 92103 333

E sales@controls-group.com

www.controls-group.com

Italy (HEAD OFFICE)

www.controlsitalia.it

Iraq

www.controlsmiddleeast.com

Spain

www.controls.es

Australia

www.controls-group.com/ipcglobal

Mexico

www.controls.com.mx

UK

www.controlstesting.co.uk

France

www.controls.fr

Poland

www.controls.pl

USA

www.controls-usa.com