

TSRST – Thermal Stress Restrained Specimen Tensile Strength

Accessories

ADVANCED PAVEMENTS TESTING SYSTEMS



Measure resistance to thermal cracking of bituminous asphalt mixtures

Used in conjunction with one of IPC Global's range of Universal Testing Machines and environmental chambers, the TSRST fixture allows engineers to perform Thermal Stress Restrained Specimen Tensile Strength tests to AASHTO TP10-93 and EN 12697-46. This method determines the tensile strength and temperature at fracture of compacted bituminous asphalt mixtures by measuring the tensile load in a specimen which is cooled at a constant rate while being restrained from contraction.

Features

- Self-aligning couplings for true axial alignment
- 25kN capacity
- Specimen Platens 150mm dia., 50mm thick
- Invar Rods provide low thermal expansion for accurate displacement measurement over the full temperature gradient
- Use of load frame alignment for mounting specimen on platens
- Optional Specimen Alignment Stand
- Threaded rods to safely support specimen and fixture after fracture.

Specifications

Test Standards

- AASHTO TP10-93
- EN 12697-46

Specimen Dimensions

Measurement

Displacement Measurement Ranges	2x LVDT
	+/- 0.5mm
	+/- 0.06mm
	+/- 2.5mm
Resolution	< 1µm
Accuracy	+/- 0.1% full scale

Temperature Measurement

On-Specimen RTDs	x3
Air temperature RTD	x1
Range	-60°C to +60°C
Resolution	< 0.1°C
Accuracy	+/- 0.5°C

Ordering Information


- 79 - PV70640 – TSRST Kit
- 79 - PV70645 – LVDT (+/-0.5mm) as per TP10-93
- 79 - PV70644 – LVDT (+/-0.06mm) increased accuracy
- 79 - PV70644 – LVDT (+/-2.5mm) as per EN 12697-46
- 79 - PV70644 – TSRST Specimen Preparation Kit with Gluing Jig
- 79 - PV70643 – TSRST Platens

Additional accessories may be required to create a working testing system. Please contact us for advice.

How It Works

A cylindrical or prismatic asphalt specimen is fixed to the TSRST platens and an initial tensile load is applied. The specimen is then cooled at a constant rate whilst the specimen is held at a constant length. The thermally induced strain is monitored up until the point of fracture.

The results can be used in pavement design to reduce thermal cracking and improve the lifecycle of bituminous asphalt pavements.

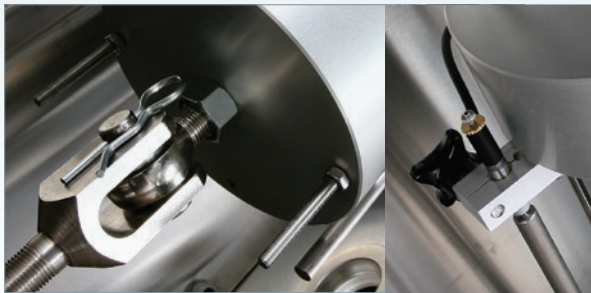

TSRST Thermal Stress Restrainted Specimen Test



TSRST Restrained Gluing Jig

► IPC Global Customer Care

At IPC Global we are proud of our products.

We are dedicated to supplying high quality, accurate, affordable, easy-to-use systems for Advanced Testing of asphalt, binders and other pavement materials. As a valued customer of IPC Global you will receive continuous, expert support and advice for your instrument. Furthermore, we offer full installation and training in the correct operation of your IPC Global equipment. For support from our expert Customer Care Team, contact your local IPC Global-Controls office/distributor or email ipcglobalsupport@controls-group.com.

Visit our website for more information www.controls-group.com/ipcglobal.



► Contact Us

IPC Global

E ipcglobalsales@controls-group.com www.controls-group.com/ipcglobal

Controls Group USA

2521 Technology Drive, Suite 203, Elgin, IL 60124, USA T +1 847 551 5775 E info@controls-usa.com www.controls-usa.com

Controls Group

T +39 02 92184 1

F +39 02 92103 333

E sales@controls-group.com

www.controls-group.com

France

www.controls.fr

Italy

www.controlsitalia.it

Iraq

www.controlsmiddleeast.com

Mexico

www.controls.com.mx

Poland

www.controls.pl

UK

www.controlstesting.co.uk

Spain

www.controls.es

www.controls-group.com/ipcglobal