



ADVANCED PAVEMENTS TESTING SYSTEMS

BITUMIX

Automatic Laboratory Mixer

**main features**

- > Conforms to EN 12697-35
- > Ideal for preparing laboratory samples for mix design
- > New improved mixing drum and heating system quickly adjustable up to 250°C
- > Mixing capacity up to 30 liters
- > Mixing speed adjustable from 5 to 35 rpm
- > Mixing temperature adjustable up to 250° C
- > Stainless steel (AISI 304) mixing container
- > Temperature control with PT 100 probe
- > Digital temperature display
- > Easy unloading by motorized tilting system, total rotation up to 130°


Standards EN 12697-35

The design and testing of bituminous mixtures includes various laboratory tests such as Marshall stability (EN 12697-34), Gyrotory compaction (EN 12697-31), Slabs laboratory compaction (EN 12697-33) to prepare specimens for Wheel tracking (EN 12697-22) and Determination of stiffness including Beam fatigue testing (EN 12697-26, EN 13108).

To produce samples for performing the above tests, it is essential that the preparation of a bituminous mixture is carried out at a reference temperature and within a limited time period in order to reduce mechanical degradation of the aggregates. The mixer should also be capable of entirely coating all mineral substances in not more than 5 minutes as stated by EN 12697-35.

The mixer consists essentially of a horizontal stainless steel mixing container with a helical mixing shaft. The container is thermally insulated and comes complete with a heating element and probe sensor which provide uniform temperature control. The container can be easily tilted by the electric motor for the unloading operation.

The control panel includes: a digital display to monitor mixing temperature, a digital thermo-regulator, a mixing speed controller and various commands.

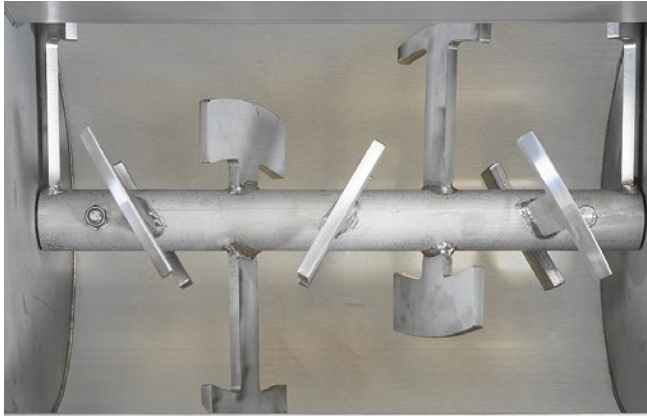

77-PV0077/C Detail of drum with helical mixing shaft



77-PV0077/C Detail of aggregate loading



77-PV0077/C Detail of unloading. The mixing cylinder is rotated by a motorized tilting system for easy unloading. The tilting angle is adjustable to 130° to speed up the unloading operation.



Ordering information

77-PV0077/C

BITUMIX automatic laboratory mixer,
30 liters capacity.
380–400 V, 50 Hz, 3 ph.

77-PV0077/CZ

As above but 220 V, 60 Hz, 3 ph.

Technical specifications

- Mixer capacity: 30 liters
- Mixing speed: adjustable from 5 to 35 rpm
- Mixing temperature: adjustable from ambient to 250°C
- Heater: 4500 W
- Temperature control: PT 100 sensor
- Tilting angle up to 130°
- Power: 7,000 W (total)
- Voltage: 380–400 V, 50 Hz, 3 ph or 220 V, 60 Hz, 3 ph
- Overall dimensions: 1,350 x 650 x 1,205mm (W x D x H)
- Weight: approx. 320kg



77-PV0077/C

▶ IPC Global Customer Care

At IPC Global we are proud of our products.

We are dedicated to supplying high quality, accurate, affordable, easy-to-use systems for Advanced Testing of asphalt, binders and other pavement materials.

As a valued customer of IPC Global you will receive continuous, expert support and advice for your instrument. Furthermore, we offer full installation and training in the correct operation of your IPC Global equipment.

For support from our expert Customer Care Team, contact your local IPC Global-Controls office/distributor or email ipcglobalsupport@controls-group.com.

Visit our website for more information www.controls-group.com/ipcglobal.



▶ Contact Us

IPC Global

E ipcglobalsales@controls-group.com www.controls-group.com/ipcglobal

CONTROLS GROUP USA

CONTROLS Group USA

2521 Technology Drive, Suite 203, Elgin, IL 60124, USA T +1 847 551 5775 E info@controls-usa.com www.controls-usa.com

www.controls-group.com/ipcglobal

CONTROLS GROUP

CONTROLS Group

T +39 02 92184 1

F +39 02 92103 333

E sales@controls-group.com

www.controls-group.com

Italy (HEAD OFFICE)

www.controlsitalia.it

Iraq

www.controlsmiddleeast.com

Spain

www.controls.es

Australia

www.controls-group.com/ipcglobal

Mexico

www.controls.com.mx

UK

www.controlstesting.co.uk

France

www.controls.fr

Poland

www.controls.pl

USA

www.controls-usa.com